

# W22L100-SDA3

## 21.5" SDI Chassis Display



### KEY FEATURES

- 21.5", 1920 x 1080
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- Chassis
- VESA mount



### SPECIFICATIONS


Display	
<b>Resolution</b>	1920x1080
<b>Contrast Ratio</b>	4000:1
<b>Display Color</b>	16.7M Colors
<b>Active Area</b>	698.4 x 392.85 mm
<b>Size</b>	32.0 inches
<b>Panel Brightness</b>	400 nits
<b>View Angles</b>	89,89,89,89
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen
Environment	
<b>Operating Humidity</b>	10% to 90% (non-condensing)
<b>Storage Temperature</b>	-10~60°C
<b>Operating Temperature</b>	0~50°C
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>USB Port</b>	1 x USB for Touch Screen
<b>Audio</b>	2 x Speaker (Optional)
<b>Video</b>	1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional)
Mechanical	
<b>Dimension</b>	518.1 x 314 x 38.5 mm
<b>Enclosure</b>	Metal
<b>Mounting</b>	VESA Mount
<b>Cooling System</b>	Fanless Design
Accessory	
<b>Accessory</b>	User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable
Power	
<b>Power Rating</b>	12V DC input

## Control

<b>Button</b>	8 key: Power Up Down Menu/Enter Left Right Exit Auto
---------------	--

## DIMENSIONS UNIT:MM

### Winmate W22L100-SDA3

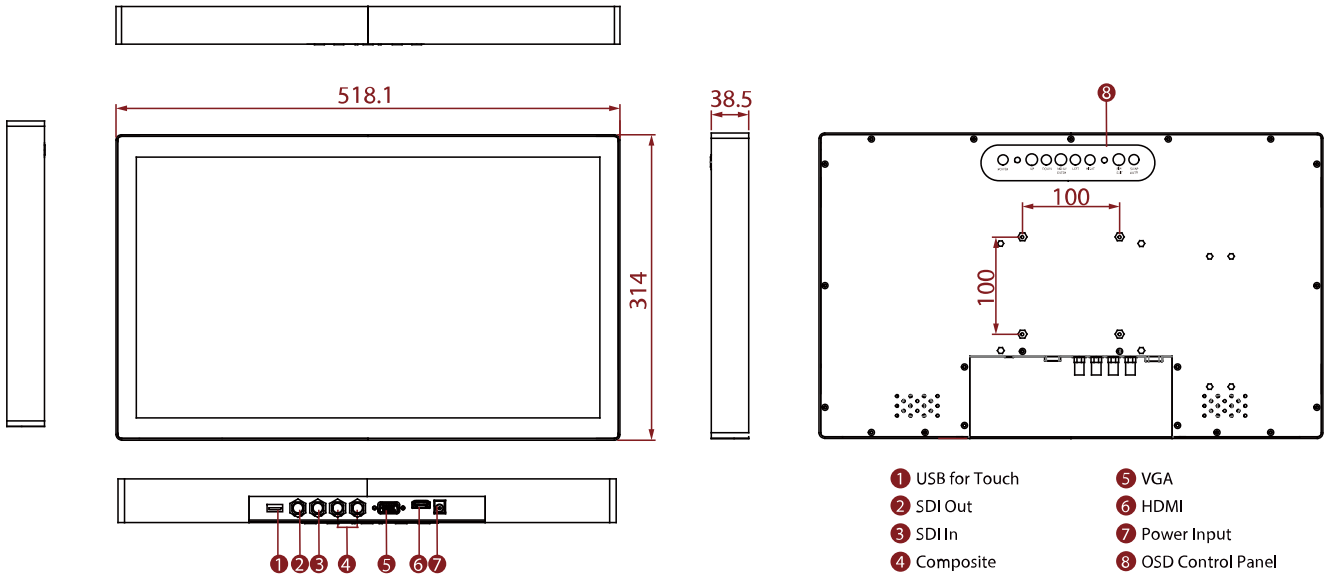

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.